

Lightweight and easy to use, these torches offer ideal manoeuvrability for smooth welding. The Ergonomic handle design provides optimal grip to achieve the perfect weld. The SR 26 torch is the most powerful in the air-cooled range.

## FEATURES

### SR 26 BASIC

**Cooling:** Air  
**Capacity:**

- in direct current (DC): 240 A
- in alternating current (AC): 200 A

**Duty cycle:** 60% Duty cycle

**Tungsten electrode:** Ø 0.5 - 4.0 mm



### SR 26 GRIP

**Cooling:** Air  
**Capacity:**

- in direct current (DC): 180 A
- in alternating current (AC): 130 A


**Duty cycle:** 35% Duty cycle

**Tungsten electrode:** Ø 0.5 - 4.0 mm



## CONFIGURATIONS

Connector	L (m)	Ref	DB		P	
			GRIP	GRIP	GRIP	GRIP
Ø 35/50 DIN	4m	044463	046054	046115		
	8m	044371	046078	046122		
Ø 35/50 AMPHENOL	4m	—	038271	—		
	8m	046184	046177	047877		

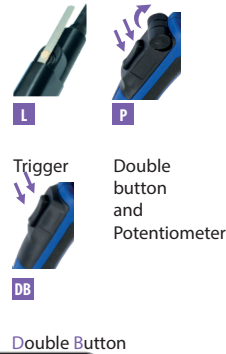

## INCLUDED

All the essential consumables for your TIG AC/DC SR26 torch in a box:

- 2 Gas nozzles (N5 and N7)
- 2 collets body (Ø1.6 + Ø2/2.4)
- 2 collet (Ø1.6 + Ø2.4)
- 2 caps (1 short + 1 long)
- 2 tungsten electrodes WR2 AC/DC (Ø1.6 + Ø2.4)

• Also available for sale without the torch (ref. 044678)

## CONSUMABLES

STANDARD ASSEMBLY

Nozzle	Collet body	Standard insulating ring	Collet	Head cover
N 4 - Ø 6.5 (x3) 038394	Ø 1.6 (x3) 044968	(x1) 045040	Ø 1.6 (x3) 044982	Courte (x1) 044944
N 5 - Ø 8.0 (x3) 045026	Ø 2.0/2.4 (x3) 044975		Ø 2.0 (x3) 044999	Longue (x1) 044951
N 6 - Ø 9.5 (x3) 038400	Ø 3.2 (x3) 045118		Ø 2.4 (x3) 045019	
N 7 - Ø 11 (x3) 045033	Ø 4 (x3) 047648		Ø 3.2 (x3) 045125	
N 8 - Ø 12.5 (x3) 045286			Ø 4 (x3) 047655	
N 10 - Ø 16 (x3) 045293				
N 12 - Ø 19 (x3) 045309				

PRO MOUNTING

Diffuser nozzle	Support for diffuser collar	Insulating ring diffuser	Standard insulating ring	Collet	Head cover
N5 - Ø 8.0 (x3) 045071	Ø 1.6 (x2) 045057	(x1) 045095	(x1) 045040	Ø 1.6 (x3) 044982	Short (x1) 044944
N 7 - Ø 11 (x3) 045088	Ø 2.0/2.4 (x2) 045064			Ø 2.0 (x3) 044999	Long (x1) 044951
				Ø 2.4 (x3) 045019	
				Ø 3.2 (x3) 045125	
				Ø 4 (x3) 047655	

## RECOMMENDATIONS

SR26	TIG 160 DC	PROTIG 161	PROTIG 200	PROTIG 201	TIG 220	TIG 300	TITAN		PROTIG 201 AC/DC	TIG 220 AC/DC	TIG 250 AC/DC	TITANIUM		EXATIG
							320	400				320	400	
35/50 + DIN														
35/50 + AMPHENOL		✓	✓	✓	✓	✓	✓	✓	✓	✓		✓		✓
EURO	Recommended for MIG/MAG generators with TIG function													